

# Falco™



## Live Bottom Trailers and Truck Bodies

*The fastest unloading Live Bottom in the industry.*



No worries about low wires, trees and bridges.



## Efficient Etnyre *Falcon* Live Bottom Trailers

- **Hauling Versatility** Hot mix asphalt, sand, gravel, recycled materials, low slump concrete, aggregates small and large. - one trailer does it all.
- **Wide Conveyor** 42" wide belt. No slats to break, bend, or wear. Wider conveyor reduces material bridging. Unloads in 1/2 revolution of the belt.
- **Twin Product Doors** Eliminates segregation, allows load to discharge in a mass, allows operator to view position of the load.
- **Lighter Empty Weight** Lightest in the industry. Larger payloads every load.
- **Steeper Side Walls** Prevents sticky material from bridging.
- **Limited Crossmembers** One crossmember, top center.




Controlled discharge.

Polymer Mixes • Superpave • Millings • Micro Surfacing • Chipseal • Sand • Gravel



- “Load over 5th wheel design” places the weight where you need it, more weight on the steer axle.
- Various lengths and axle configurations to better fit your hauling requirements and state bridge laws.
- Various configurations allow for maximum payloads.
- Unload on angles and inclines.

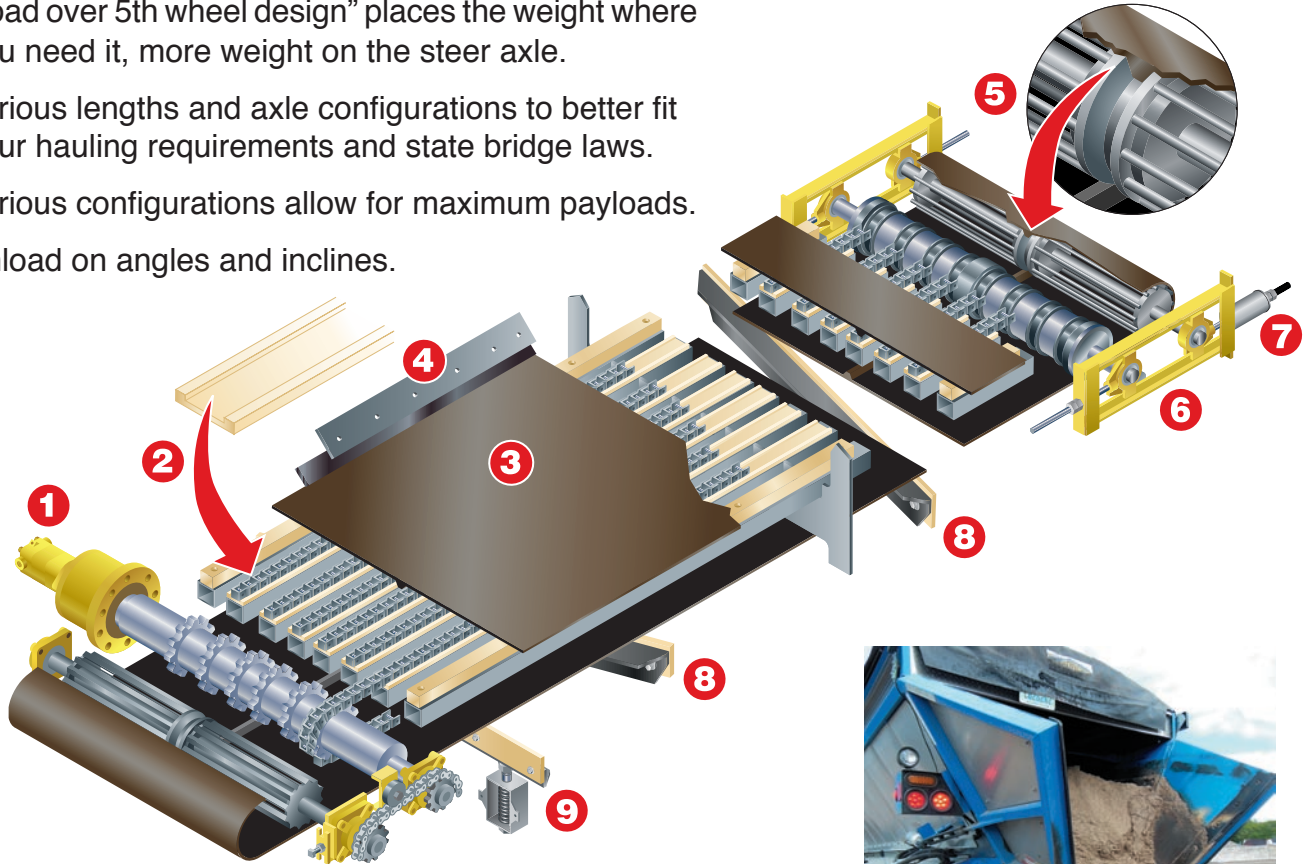

1. Direct hydraulic drive with 30:1 gear reducer. 100,000 inch pounds of torque. More power to unload difficult materials faster.
2. Chain guides made of ultra high molecular polyethylene. Eliminates the need for lubrication. Better support with 6 chain system directly supported by conveyor frame.
3. Composite belt, chemical and heat resistant.
4. Bolt in easy to adjust and replace flashing covers.
5. Positive, full length belt centering.
6. Separate tension adjustments for the belt and the chains.
7. Belt tension gauge.
8. Belt scrapers.
9. Spring loaded belt scraper.



Save time unloading under obstacles.

# Haul larger payloads and unload faster with the industry's leading design.



## E. D. ETNYRE & CO.

1333 South Daysville Road, Oregon, Illinois 61061-9778

Phone: 1-800-995-2116 or 1-815-732-2116

Fax: 1-815-732-7400, Email: [sales@etnyre.com](mailto:sales@etnyre.com)

Web Site: [www.etnyre.com](http://www.etnyre.com)

E. D. Etnyre & Co., whose policy is one of continuous improvement, reserves the right to change specifications without notice.

Photos and illustrations contain standard and optional equipment.

L-751-17  
Supersedes L-751-15